


Dimensions and Loads

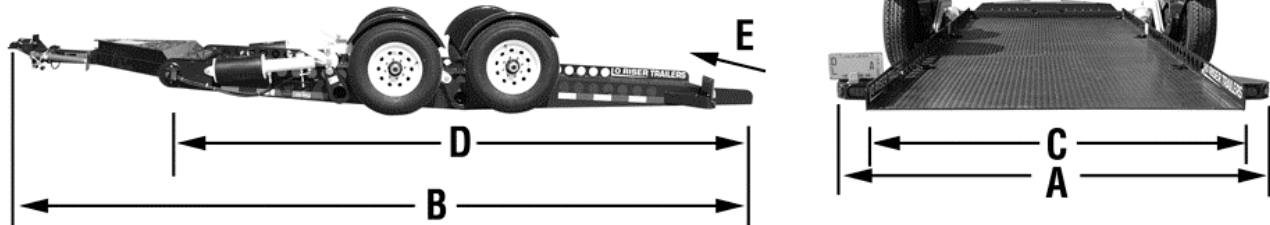

Dimensions:

- A = 8' 6" (102")
- B = 22' 1" (265.0")
- C = 6' 2" (74")
- D = 16' (192")
- E = 4 Degree Load Angle
- Clearance of deck at transport height = 11"

Loads:

- 425 lbs Tongue Load (Trailer)
- 2250 lbs Tongue Load (Cargo)
- 2650 lbs Total Tongue Load
- 806 lbs Wheel Load (Trailer)
- 2944 lbs Wheel Load (Cargo)
- 3750 lbs Total Wheel Load
- Two (2), 7500 lb Axles

Specifications and Features (Base Trailer)

- Ground to Travel Height
- GVWR 17650 lbs
- Payload Maximum 14000 lbs
- Trailer Weight 3650 lbs
- 4 to 1 Payload to Trailer Weight Ratio
- Tires L6 T235/85R16LRG (3750 lbs Capacity Each)
- Cylinders 3-1/2" Diameter x 12" Stroke
- Adjustable Ball Hitch 2-5/16" Diameter
- Ramp Built-in
- Larger Lockable Storage Compartment
- Controlled Descent
- Tie Down Rail Built-in

- DC Electric/Hydraulic Pump
- Tongue Jack
- Six (6) "D" Rings
- Breakaway Kit with Chains
- Electric Brakes Both Axles
- LED Lighting with 7 Pin Connector
- Single Pin Grounded 12 VDC Power Cable
- Control Switch with Cable
- HSLA Steel Construction (No Angle or Channel Iron)
- Grade 55 - 3/16" Diamond Plate Flooring
- Combination Hydraulic/Rubber Suspension

Options

- On-Board Power – includes Battery, Charger & Maintainer 12784
- Cargo Winch 8000# 12785
- Pintle Hitch (2-1/2" Lunette) 12782
- Remote Power Option..... 12783
(Cord in addition to On Board Power)

- Spare Tire, Wheel & Carrier..... 12543
- Special Paint 12789
(Dk Navy Blue is Standard)