


**Dimensions and Loads**

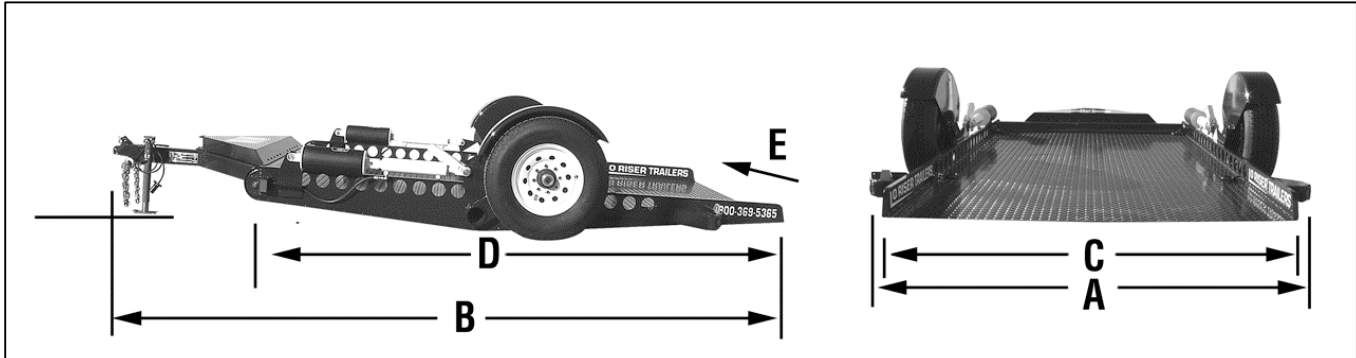

**Dimensions:**

- A = 8' 6" (102")
- B = 18' 6" (222")
- C = 6' 2" (74")
- D = 12' 8" (152")
- E = 4 Degree Load Angle
- Clearance of deck at transport height = 10.7"

**Loads:**

- 425 lbs Tongue Load (Trailer)
- 1075 lbs Tongue Load (Cargo)
- 1500 lbs Total Tongue Load
- 1038 lbs Wheel Load (Trailer)
- 2462 lbs Wheel Load (Cargo)
- 3500 lbs Total Wheel Load
- One (1), 7000 lb Axle

**Specifications and Features** (Base Trailer)

- |  |  |
|--|--|
| <ul style="list-style-type: none"> <li>Ground to Travel Height</li> <li>GVWR 8500 lbs</li> <li>Payload Maximum 6000 lbs</li> <li>Trailer Weight 2500 lbs</li> <li>2.5 to 1 Payload to Trailer Weight Ratio</li> <li>Tires ST235/80R16LRE (3500 lbs Capacity Each)</li> <li>Cylinders 3-1/2" Diameter x 12" Stroke</li> <li>Adjustable Hitchball 2-5/16" Diameter</li> <li>Ramp Built-in</li> <li>Lockable Storage Compartment</li> <li>Controlled Descent</li> <li>Tie Down Rail Built-in</li> </ul> | <ul style="list-style-type: none"> <li>DC Electric/Hydraulic Pump</li> <li>Tongue Jack</li> <li>Four (4) "D" Rings</li> <li>Breakaway Kit with Chains</li> <li>Electric Brakes</li> <li>LED Lighting with 7 Pin Connector</li> <li>Single Pin Grounded 12 VDC Power Cable</li> <li>Control Switch with Cable</li> <li>HSLA Steel Construction (No Angle or Channel Iron)</li> <li>Combination Hydraulic/Rubber Suspension</li> </ul> |
|--|--|

**Options**

- |   |   |
|---|---|
| <ul style="list-style-type: none"> <li>On Board Power – includes Battery, Charger &amp; Maintainer.....12784</li> <li>Cargo Winch 4000# .....12397</li> <li>Pintle Hitch (2-1/2" Lunette).....12782</li> <li>Remote Power Option .....12783<br/>(Cord in addition to On Board Power)</li> </ul> | <ul style="list-style-type: none"> <li>Spare Tire, Wheel &amp; Carrier ..... 12544</li> <li>Special Paint ..... 12789<br/>(Dk Navy Blue is Standard)</li> </ul> |
|---|---|